


# Flexible Post

FLEXIBLE TO 90°

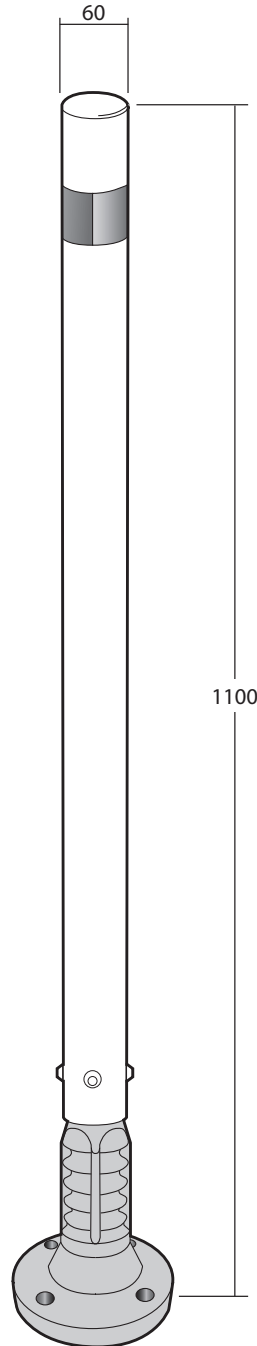

POLY FLEX POST

## Price Excludes GST

**Important:** Ensure installation and maintenance are properly executed to obtain maximum performance, efficiency and durability from your Lighthouse product.

**Disclaimer:** While every care has been taken with the details on this specification sheet Lighthouse Bollards & Caps accepts no responsibility for any inaccuracies. Lighthouse Bollards & Caps also reserves the right to change these specifications without notice to always ensure that you are receiving a superior product.

## SPECIFICATIONS

Poly Flex Post is formulated Polyethylene 80 UV stabilised. An extremely flexible and hard wearing product.

The Poly Flex bases should be installed with the vertical rib facing the oncoming traffic.

The base can be bolted onto any concrete surface with masonry anchors.


Recommended diameter of masonry anchor is 16 mm  $\varnothing$  x 120 mm long with 30 mm washer.

### Post

Height - 1100  
 $\varnothing$  Base - 190  
Post - 600D  
Weight - 2 kg

### Options

- 16 mm Galvanised Bolts + 30 mm Washers.



SOCKET BASE  
AVAILABLE TO SUIT  
60MM NB SOCKET

**Lighthouse Bollards & Caps**  
579 Warrigal Rd, Ashwood 3147  
Mobile Phone: 0412 406 960  
Fax: 61 3 9885 7768  
Phone: 03 9885 8684  
[www.lighthouse-bollards.com](http://www.lighthouse-bollards.com)  
*Australian owned company*